


LiGHT SKY
FLY DRAGON LIGHTING EQUIPMENT CO.,LTD

SUPER SCOPE HYBRID

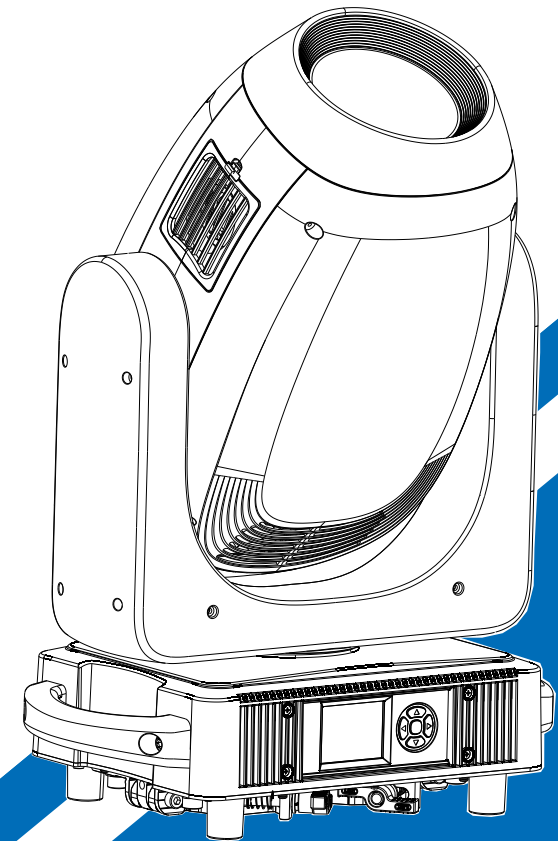

LiGHT SKY

Web: www.lightsky.com.cn

Tel: 0086-20-61828288

Fax: 0086-20-61828188 Pc: 510820

E-mail: flydragon@lightsky.com.cn

Address: No. 4, Jingneng Road 1,
Huadu District, Guangzhou, China



WWW.LIGHTSKY.COM.CN

User Channel

Please read the instruction carefully before use

6.2.Channel Setting

Enter the MENU menu, select the Personal Settings function, select the channel mode, press the OK button to confirm, you can use the up and down keys to select:22 channels (default), 25channels, Press the OK key to enter the selection confirmation and return to the previous menu.

6.3.Address Setting

Enter MENU, select the DMA setting function, select the address code setting, press the OK button to confirm, and the current DMA address will be displayed in the On screen display. Use the up/down buttons to select addresses 001-512, press the OK button to save the current address code, and return to the previous menu level.

Please refer to the following diagram to address your DMX512 channel for the first 4 units.

Channel mode	Unit 1 Address	Unit 2 Address	Unit 3 Address	Unit 4 Address
22 CH	1	23	45	67
25 CH	1	26	51	76

6.4.DMX 512 Configuration

Please control the fixture by referring to the configurations below

22 Channel	25 Channel	DMX	Function	Note
1	1	0—255	Pan positioning	
2	2	0—255	Fine Pan positioning	
3	3	0—255	Tilt positioning	
4	4	0—255	Fine Tilt positioning	
/	5	0—255	Speed pan/tilt	
5	6		DeviceSet(Hold 3s)	
		0-9	No function	
		10-19	Fan high speed	
		20-29	Fan auto speed	
		30-39	Fan slow speed	
		40-49	Reset Pan&Tilt	
		50-59	Reset CMY	
		60-69	Reset Gobo	
		70-79	Reset Frame	
		80-89	Reset Head	
		90-99	Reset other(except P&T)	
		100-109	Reset All	
		110-119	No function	
		120-129	No function	
		130-139	Pan invert on	
		140-149	Pan invert off	
		150-159	Tilt invert on	
		160-169	Tilt invert off	
		170-177	LED frequency 1kHz	
		178-185	LED frequency 3.6kHz	
		186-193	LED frequency 7.2kHz	
		194-199	LED frequency 25kHz	
		200-204	Dimmer curve linear	
		205-209	Dimmer curve square1	
		210-214	Dimmer curve square2	
		215-219	Dimmer curve “S”	
		220-229	Dimmer fast	
		230-239	Dimmer smooth	
		240-255	No function	
6	7	0—255	Cyan	
7	8	0—255	Magenta	
8	9	0—255	Yellow	
9	10		Virtual ColorWheel	
		0-5	CMY enable	
		6-23	Red	
		24-41	Green	
		42-59	Blue	
		60-77	Orange	
		78-95	light blue	

22 Channel	25 Channel	DMX	Function	Note
		96-113 114-133 134-194 195-255	CRI CMY enable virtual Colorwheel CW slow to fast virtual Colorwheel CCW fast to slow	
10	11	0-9 10-19 20-29 30-39 40-49 50-59 60-69 70-79 80-87 88-95 96-103 104-111 112-119 120-127 128-135 136-139 140-194 195-249 250-255	RotgoboWheel Open RotGobo1 RotGobo 2 RotGobo 3 RotGobo 4 RotGobo 5 RotGobo 6 RotGobo 7 RotGobo1shake, slow to fast RotGobo2shake, slow to fast RotGobo3shake, slow to fast RotGobo4shake, slow to fast RotGobo5shake, slow to fast RotGobo6shake, slow to fast RotGobo7shake, slow to fast Open RotGoboWheel CW fast to slow RotGoboWheel CCW slow to fast Random Gobo	
11	12	0-127 128-189 190-193 194-255	GoboRot GoboRot indexing 0° - 360° RotGobo CW fast to slow Stop RotGobo CCW slow to fast	
12	13	0-255	CTO	
13	14	0-127 128-255	Animation Animation index Animation rotation	
14	15	0-9 10-63 64-127 128-191 192-207 208-223 224-239 240-255	Prism&PrismRot Prism out Prism In & indexing Forwards prism rotation from slow to fast Backwards prism rotation from fast to slow prism flickered 90° prism flickered 180° prism flickered 270° prism flickered 360°	
15	16	0-255	Frost	
16	17	0-255	Focus8bit	
/	18	0-255	FocusFine16bit	

22 Channel	25 Channel	DMX	Function	Note
17	19	0-255	Zoom8bit	
/	20	0-255	ZoomFine16bit	
18	21	0-9 10-19 20-68 69-79 80-128 129-139 140-188 189-255	Strobe Strobe closed Strobe open Normal strobe effect slow to fast Strobe open Pulse strobe Strobe open Random strobe Strobe open	
19	22	0-255	Dimmer	
20	23	0-255	Dimmer Fine	
21	24	0-127 128-158 159-190 191-225 226-255	Auto Focus Auto Focus Disable 10m Auto Focus Enable 15m Auto Focus Enable 20m Auto Focus Enable 30m Auto Focus Enable	
22	25	0-255	Auto FocusFine	