


LiGHT SKY

FLY DRAGON LIGHTING EQUIPMENT CO.,LTD

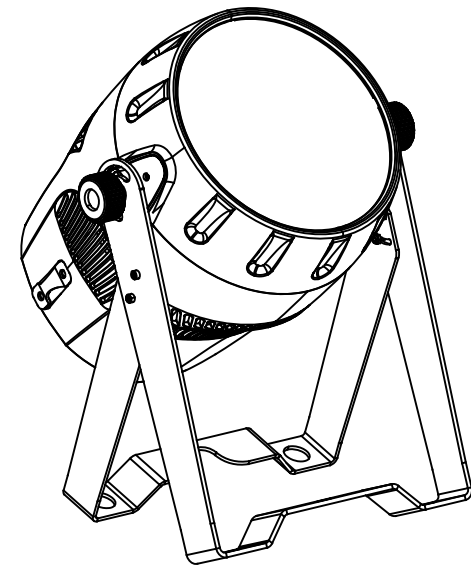

LiGHT SKY

Web: www.lightsky.com.cn

Tel: 0086-20-61828288

Fax: 0086-20-61828188 Pc: 510820

E-mail: flydragon@lightsky.com.cn

Address: No. 4, Jingneng Road 1,
Huadu District, Guangzhou, China



WWW.LIGHTSKY.COM.CN

PL1215 II

USER CHANNEL

Please read these user manual carefully before use!

CHANNEL FUNCTION

channel (Standard 10CH)

Channel	DMX	Percentage	Function	Note
1	0 - 255	0 - 100	Dimmer	
2	0 - 255	0 - 100	DimmerF	
3			Strobe	
	0 - 9		Reserved	
	10 - 199		Strobe-effect from slow to fast	
	200 - 249		Random strobe-effect from slow to	
	250 - 255		Reserved	
4	0 - 255	0 - 100	Red	
5	0 - 255	0 - 100	Green	
6	0 - 255	0 - 100	Blue	
7	0 - 255	0 - 100	White	
8			Color Macro	
	0 - 3		Reserved	
	4 - 255		Color Macro	
9	0 - 255	0 - 100	Zoom	
10	0 - 5		No effect	
	6 - 18		2500K - 2700K	
	19 - 31		2700K - 3000K	
	32 - 44		3000K - 3200K	
	45 - 57		3200K - 3500K	
	58 - 70		3500K - 3700K	
	71 - 83		3700K - 4000K	
	84 - 96		4000K - 4500K	
	97 - 109		4500K - 5000K	
	110 - 122		5000K - 5600K	
	123 - 135		5600K - 6000K	
	136 - 148		6000K - 6500K	
	149 - 161		6500K - 7000K	
	162 - 174		7000K - 7500K	
	175 - 187		7500K - 8000K	
	188 - 200		8000K - 8500K	
	201 - 213		8500K - 9000K	
	214 - 226		9000K - 9500K	
	227 - 254		9500K - 10000K	
	255		10000K	

channel (Simplement 5CH)

Channel	DMX	Percentage	Function	Note
1	0 - 255	0 - 100	Red	
2	0 - 255	0 - 100	Green	
3	0 - 255	0 - 100	Blue	
4	0 - 255	0 - 100	White	
5	0 - 255	0 - 100	Zoom	