


# LIGHT SKY<sup>®</sup>

FLY DRAGON LIGHTING EQUIPMENT CO.,LTD

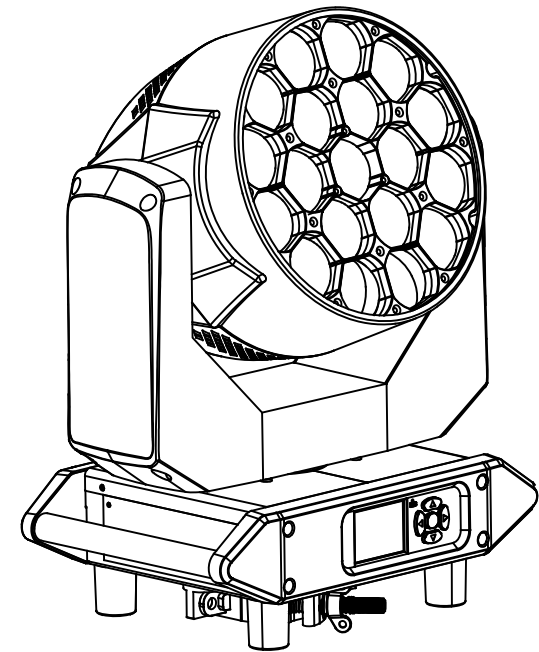

## LIGHT SKY<sup>®</sup>

Tel:0086-20-61828288

Fax:0086-20-61828188 Pc:510800

Web:www.lightsky.com.cn

E-mail: flydragon@lightsky.com.cn

asia@lightsky.com.cn

india@lightsky.com.cn

europa@lightsky.com.cn

latinamerica@lightsky.com.cn

middle-east@lightsky.com.cn

american@lightsky.com.cn

Address: No. 43, Yunfeng Road, Xiuquan Street,  
Huadu District, Guangzhou, China

地址：广州市花都区秀全街云峰路43号



LIGHT SKY<sup>®</sup>



## TX1920-HC

### USER MANUAL

Please read these user manual carefully before use!

**CHANNEL FUNCTION**

**Standard (13CH)**

Channel	DMX	Percentage	Function	Note
1	0 - 255	0 - 100	Pan	
2	0 - 255	0 - 100	Pan fine	
3	0 - 255		Tilt	
4	0 - 255	0 - 100	Tilt fine	
5	0 - 255	0 - 100	P/T Speed	
6			Function	
	0 - 10		Reserved	
	11 -- 20		Total reset	
	21 -- 30		Pan/Tilt reset	
	31 -- 40		Zoom reset	
	41 -- 50		Silent mode	
	51 -- 60		Standard mode	
	61 -- 70		Hot mode	
	71 -- 80		Pan invert on	
	81 -- 90		Tilt invert on	
	91 -- 100		P/T invert off	
	101 -- 110		PT swap on	
	111 -- 120		PT swap off	
	121 -- 130		Backlight time Always	
	131 -- 140		Backlight time Auto	
	141 -- 150		Linear	
	151 -- 160		Square	
	161 -- 170		I-Square	
	171 -- 180		Scurve	
	181 -- 190		Led Hz 3000HZ	
	191 -- 200		Led Hz 6000HZ	
201 -- 210		Led Hz 12000HZ		
211 -- 220		Led Hz 24000HZ		
221 -- 230		Dimmer Speed Fade		
231 -- 240		Dimmer Speed Snap		
241 -- 255		Reserved		
7	0 - 255	0 - 100	Dimmer	
8	0 - 255	0 - 100	Dimmer fine	
9			Strobe	
	0 - 9		Reserved	
	10 - 199		Strobe-effect from slow to fast	
	200 - 249		Random strobe-effect from slow to fast	
250 - 255		Reserved		
10	0 - 255	0 - 100	Cold white	
11	0 - 255	0 - 100	Warm white	
12	0 - 255	0 - 100	CCT	
13	0 - 255	0 - 100	Zoom	